

Transmitter for temperature, head mounting for Pt100 2 wire technology universal, HART® SIEMENS Sitrans TH300 Type series PA230.



Application area

- all process industry field

Features

- Digital programmable transmitter
- Suitable for installation in connecting heads in accordance with DIN, form B
- Input for:
 - Resistance thermometer (2-, 3- or 4-wire technology)
 - Thermocouples
 - Resistance-based sensor and DC voltage sources
- Output signal: 4...20 mA invertible, 2-wire technology
- Configurable via HART®:
 - optional with a handheld communicator
 - optional with a HART® modem and the SIMATIC PDM parameterization software
- Power supply: 8...35 V DC; 8...30 V DC (Ex)
- Electrically isolated
- Test sockets for multimeters for monitoring purposes and plausibility checks without interruption of the current loop.
- Diagnostics LED:
 - Sensor and power supply have been correctly connected (LED displays a green light)
 - Sensor breakage or short-circuit (LED flashes red)
 - Internal device fault (steady red light)
- Sensor monitoring, open circuit and short-circuit
- Self-monitoring

Options

- Approvals/Certificates
 - Explosion protection for gases and dust
 - Classification per SIL2
- Parameterization via PC Software
- Special characteristic
- Expanded diagnostic functions, such as slave pointer, operating hours counter

Application

The digital transmitter converts different signal sources to a load-independent current signal commonly found in process control systems. The output is the standard sensor line signal. It is a load-independent, 4 to 20 mA, DC signal which is superimposed with the digital HART® signal. The transmitter has extensive configuration options.

Technical data

Constructional design		Resistance-based sensors	
Dimensions:	see dimensional drawing, molded plastic	Measured variable:	Actual resistance
Degree of protection per EN 60529:	■ case IP 40 ■ Terminals IP 00	Sensor type:	Resistance-based, potentiometers
Weight:	50 g (0.11 lb)	Units:	Ω
Input		<u>Connection:</u>	
<u>Resistance thermometer</u>		Normal connection:	1 resistance-based sensor (R) in 2-, 3- or 4-wire technology
Measured variable:	Temperature	Generation of average value:	2 resistance-based sensors in 2-wire technology for generation of average value
Sensor type:	per EN 60751 – Pt25...Pt1000 per JIS C 1604; $a = 0.00392 \text{ K}^{-1}$ – Pt25...Pt1000 per EN 60751 – Ni25...Ni1000	Generation of difference:	2 resistance thermometers in 2-wire technology ($R1 - R2$ or $R2 - R1$)
<u>Special type:</u>		<u>Interface:</u>	
Sensor factor:	0.25...10 (adaptation of the basic type, e.g. Pt100 to version Pt25 ... 1000)	2-wire technology:	parameterizable line resistance $\leq 100 \Omega$ (loop resistance)
Units:	°C or °F	3-wire technology:	no balancing required
<u>Connection</u>		4-wire technology:	no balancing required
Standard connection:	1 resistance thermometer (RTD) in 2-, 3- or 4-wire technology	Sensor current:	$\leq 0.45 \text{ mA}$
Generation of average:	value 2 identical resistance thermometers in 2-wire technology for generation of average temperature	Response time:	$\leq 250 \text{ ms}$ for 1 sensor with open circuit monitoring
Generation of difference:	2 identical resistance thermometers (RTD) in 2-wire technology (RTD 1 – RTD 2 or RTD 2 – RTD 1)	Open-circuit monitoring:	always active (cannot be disabled)
<u>Interface</u>		Short-circuit monitoring:	
2-wire technology:	parameterizable line resistance $\leq 100 \Omega$ (loop resistance)	Measuring range:	parameterizable max. 0...2200 Ω (see table "Digital measuring errors")
3-wire technology:	no balancing required	Min. measured span:	5 Ω ... 25 Ω (see table "Digital measuring errors")
4-wire technology:	no balancing required	Characteristic curve:	Resistance-linear or special characteristic curve
Sensor current:	$\leq 0.45 \text{ mA}$	<u>Thermocouples</u>	
Response time:	$\leq 250 \text{ ms}$ for 1 sensor with open circuit monitoring	Measured variable:	Temperature
Open-circuit monitoring:	always active (cannot be disabled)	Sensor type (thermocouples):	
Short-circuit monitoring:	can be switched on/off (default value: ON)	Type B:	Pt30Rh-Pt6Rh per IEC 584
Measuring range:	parameterizable (see table "Digital measuring errors")	Type C:	W5%-Re per ASTM 988
Min. measured span:	10 °C (18 °F)	Type D:	W3%-Re per ASTM 988
Characteristic curve:	Temperature-linear or special characteristic curve	Type E:	NiCr-CuNi per IEC 584
		Type J:	Fe-CuNi per IEC 584
		Type K:	NiCr-Ni per IEC 584
		Type L:	Fe-CuNi per DIN 43710
		Type N:	NiCrSi-NiSi per IEC 584
		Type R:	Pt13Rh-Pt per IEC 584
		Type S:	Pt10Rh-Pt per IEC 584
		Type T:	Cu-CuNi per IEC 584
		Type U:	Cu-CuNi per DIN 43710
		Units:	°C or °F

<u>Connection:</u>	
Standard connection:	1 thermocouple (TC)
Generation of average value:	2 thermocouples (TC)
Generation of difference:	2 thermocouples (TC) (TC1 – TC2 or TC2 – TC1)
Response time:	≤ 250 ms for 1 sensor with open circuit monitoring
Open-circuit monitoring:	can be switched off

Cold junction compensation

Internal:	with integrated Pt100 resistance thermometer
External:	with external Pt100 IEC 60571 (2- or 3-wire technology)
External fixed:	cold junction temperature can be set as fixe value
Measuring range:	parameterizable (see table "Digital measuring errors")
Min. measured span:	min. 40 ... 100 °C (72 ... 180 °F) (see table "Digital measuring errors")
Characteristic curve:	Temperature-linear or special characteristic

mV sensor

Measured variable:	DC voltage
Sensor type:	DC voltage source (DC voltage source possible over an externally connected resistor)
Units:	mV
Response time:	≤ 250 ms for 1 sensor with open circuit monitoring
Open-circuit monitoring:	can be switched off
Measuring range:	<ul style="list-style-type: none"> ■ -10 ... 70 mV ■ -100 ... 1100 mV
Min. measured span:	2 mV or 20 mV
Overload capability of the input:	-1.5 ... +3.5 V DC
Input resistance:	≥ 1 MΩ
Characteristic curve:	Voltage-linear or special characteristic

Output

Output signal:	4 ... 20 mA, 2-wire technology with communication acc. to HART Rev. 5.9
Auxiliary power:	11 ... 35 V DC (to 30 V with Ex)
Max. load:	$(U_{aux} - 11 \text{ V})/0.023 \text{ A}$
Overrange:	3.6...23 mA, infinitel adjustable (default range: 3.80 mA ... 20.5 mA)

Error signal:	(e.g. following sensor fault) 3.6...23 mA, infinitel adjustable (conforming NE43) (default value: 22.8 mA)
Sample cycle:	0.25 s nominal
Damping:	Software filter 1st order 0...30 s (parameterizable)
Protection:	against reversed polarity
Electrically isolated:	input against output (1 kV _{eff})

Measuring accuracy

Digital measuring errors:	see table "Digital measuring errors"
Reference conditions:	<ul style="list-style-type: none"> ■ Auxiliary power 24 V ± 1 % ■ Load 500 Ω ■ Ambient temperature 23 °C ■ Warming-up time > 5 min
Error in the analog output: (digital/analog converter)	< 0.025 % of span
Error due to internal cold junction:	< 0.5 °C (0.9 °F)
Influence of ambient temperature:	Analog measuring error: 0.02 % of span/10°C (18 °F) Digital measuring errors with resistance thermometers: 0.06 °C (0.11 °F)/10°C (18 °F) with thermocouples: 0.6 °C (1.1 °F)/10°C (18 °F)
Auxiliary power effect:	< 0.001 % of span/V
Effect of load impedance:	< 0.002 % of span/100 Ω
Long-term drift:	<ul style="list-style-type: none"> - in the first month < 0.02 % of span - after one year < 0.2 % of span - after 5 years < 0.3 % of span

Temperature ranges and ambient conditions

Ambient:	-40...+85 °C (-40...+185 °F)
Storage:	-40...+85 °C (-40...+185 °F)
Relative humidity:	< 98 %, with condensation

Electromagnetic compatibility

According to: EN 61326 and NAMUR NE21

Certificates and Approvals

Explosion protection ATEX SIEMENS Sitrans TH300

EC type test certificate: PTB 05 ATEX 2040X

Type of protection:
 "Intrinsic safety"
 II 1G Ex ia IIC T6/T4
 II 2(1)G Ex ia/ib IIC T6/T4
 II 3(1)G Ex ia/ic IIC T6/T4
 II 1D Ex iaD 20 T115 °C
 $U_i = 30 \text{ VDC}$
 $I_i = 100 \text{ mA}$
 $P_i = 750 \text{ mW}$
 $L_i = 104 \mu\text{H}$
 $C_i = 11 \text{ nF}$

Type of protection:
 "Operating equipment that is nonignitable and has limited energy"
 II 3G Ex nL IIC T6/T4
 II 3G Ex nA IIC T6/T4

Software Requirements (SIPROM T)

PC operating system:
 Windows ME, 2000 und XP
 Windows 7
 Windows 8

Digital measuring errors

Resistance thermometer

Input	Measuring range	Min. measured span	Digital accuracy
	°C / °F	°C / °F	°C / °F
per EN 60751			
Pt25	-200 ... +850 (-328...+1562)	10 / (18)	0.3 / (0.54)
Pt50	-200 ... +850 (-328...+1562)	10 / (18)	0.15 / (0.27)
Pt100 ... Pt200	-200 ... +850 (-328...+1562)	10 / (18)	0.1 / (0.18)
Pt500	-200 ... +850 (-328...+1562)	10 / (18)	0.15 / (0.27)
Pt1000	-200 ... +350 (-328...+662)	10 / (18)	0.15 / (0.27)
per JIS C1604-81			
Pt25	-200 ... +649 (-328 ... +1200)	10 / (18)	0.3 / (0.54)
Pt50	-200 ... +649 (-328 ... +1200)	10 / (18)	0.15 / (0.27)
Pt100 ... Pt200	-200 ... +649 (-328 ... +1200)	10 / (18)	0.1 / (0.18)
Pt500	-200 ... +649 (-328 ... +1200)	10 / (18)	0.15 / (0.27)
Pt1000	-200 ... +350 (-328...+662)	10 / (18)	0.15 / (0.27)
Ni 25 ... Ni1000	-60 ... +250 (-76...+482)	10 / (18)	0.1 / (0.18)

Resistance-based sensors

Input	Measuring range	Min. measured span	Digital accuracy
	Ω	Ω	Ω
Resistance	0 ... 390	5	0.05
Resistance	0 ... 2200	25	0.25

Thermocouples

Input	Measuring range	Min. measured span	Digital accuracy
	°C / °F	°C / °F	°C / °F
Type B	0 ... 182 (32 ... 3308)	100 / (180)	2 ¹ / (3.60)
Type C (W5)	0 ... 2300 (32 ... 4172)	100 / (180)	2 / (3.60)
Type D (W3)	0 ... 2300 (32 ... 4172)	100 / (180)	1 ² / (1.80)
Type E	-200 ... +1000 (-328 ... +1832)	50 / (90)	1 / (1.80)
Type J	-210 ... +1200 (-346 ... +2192)	50 / (90)	1 / (1.80)
Type K	-230 ... +1370 (-382 ... +2498)	50 / (90)	1 / (1.80)
Type L	-200 ... +900 (-328 ... +1652)	50 / (90)	1 / (1.80)
Type N	-200 ... +1300 (-328 ... +2372)	50 / (90)	1 / (1.80)
Type R	-50 ... +1760 (-58 ... +3200)	100 / (180)	2 / (3.60)
Type S	-50 ... +1760 (-58 ... +3200)	100 / (180)	2 / (3.60)
Type T	-200 ... +400 (-328 ... +752)	40 / (72)	1 / (1.80)
Type U	-200 ... +600 (-328 ... +1112)	50 / (90)	2 / (3.60)

¹ The digital accuracy in the range 0 to 300 °C (32 to 572 °F) is 3 °C (5.4 °F).

² The digital accuracy in the range 1750 to 2300 °C (3182 to 4172 °F) is 2 °C (3.6 °F).

mV sensor

Input	Measuring range	Min. measured span	Digital accuracy
	mV	mV	µV
mV sensor	-10 ... +70	2	40
mV sensor	-100 ... +1100	20	400

The digital accuracy is the accuracy after the analog/digital conversion including linearization and calculation of the measured value.


An additional error is generated in the output current 4 to 20 mA as a result of the digital/analog conversion of 0.025 % of the set span (digital-analog error).

The total error under reference conditions at the analog output is the sum from the digital error and the digital-analog error (poss. with the addition of cold junction errors in the case of thermocouple measurements).



Parameterization

The SIEMENS Sitrans TH300 is configured via HART®. This can be done using a handheld communicator or even more conveniently with a HART® modem and the SIMATIC PDM parameterization software.

Connection diagram

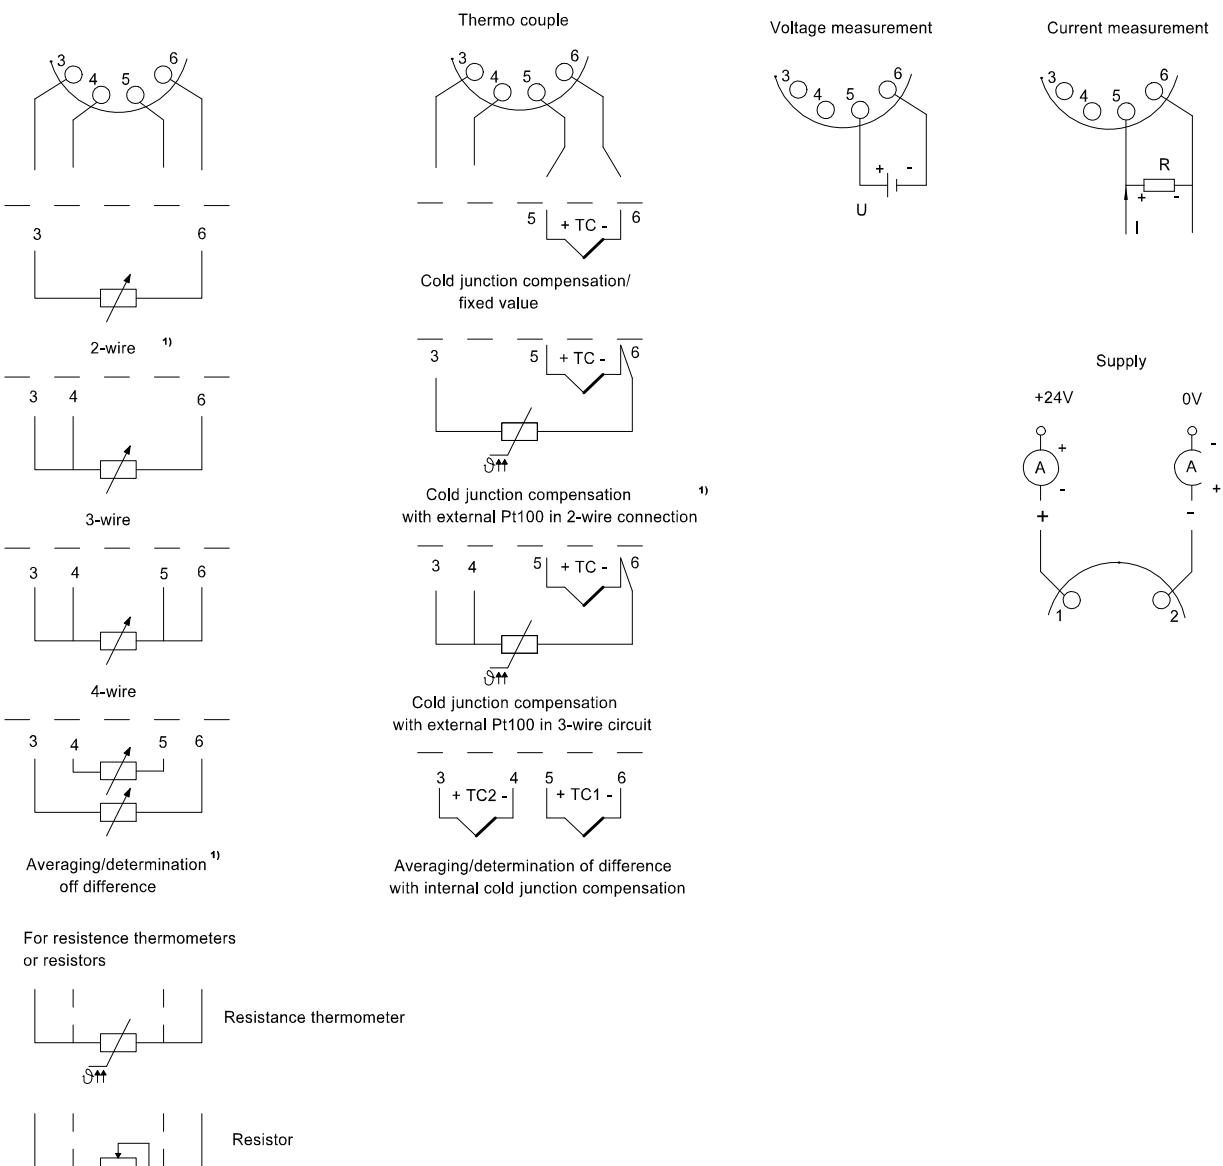

Dimensions

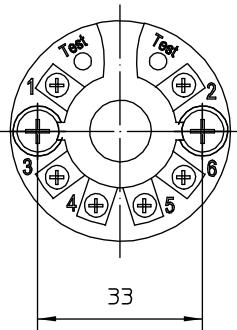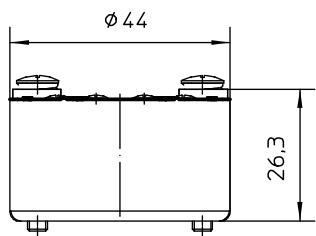

Internal diameter
of center hole 6,3 mm

Fixing screw
M4x25

Order details

**Transmitter for temperature, head mounting for Pt 100,2 wire technology universal, HART® SIEMENS Sitrans TH300
Type series PA230.**

Order code for temperature, head mounting for Pt 100,2 wire technology universal, HART® SIEMENS Sitrans TH300			
PA2300		standard	
PA2301	design	Ex-protection, type of ex-protection as follows	
F11	standard range	input	Pt100 in 3-wire technology
		temperature range	0...100 °C
		error current (following sensor breakage)	22.8 mA
		sensor offset	0 °C
		damping	0.0 s
F12	custom-made configuration	input	as per customers specification
		temperature range	
		error current (following sensor breakage)	
		sensor offset	
		damping	
H21	output signal	4...20 mA, 2-wire technology, HART®	

Additional features (to be indicated in case of need, only):		
S81	type of ex-protection (SIEMENS Sitrans TH300)	(Ex) II 1G Ex ia IIC T6/T4
		(Ex) II 2(1)G Ex ia/b IIC T6/T4
		(Ex) II 3(1)G Ex ia/ic IIC T6/T4
		(Ex) II 1D Ex iaD 20 T115 °C
		(Ex) II 3G Ex nL IIC T6/T4
		(Ex) II 3G Ex nA IIC T6/T4
W2606	functional safety per IEC 61508, classification per SIL2	

Order code (example): PA2300 - F11 - H21