

CA 2004 Fast response resistance thermometer

Protection tube

Construction	Closed-end tube
Insertion length "L"	Customer to specify
Material	SS 316 - (Wst 1.4401)
Process connection	1/2" BSP

Connection head

Model	"B" according DIN 43729
Material	Cast aluminium
Cable entry	M20 x 1.5 cable gland

Measuring insert


Construction	Fixed
Tip	Reduced
Stem diameter	9 mm
Tip diameter	6 mm

Sensor

	Single Pt100: "S" Duplex Pt100: "D"
Accuracy	According IEC 751 class B
Style / Connection	3 wire system (Optional 4 wire system)
Range	-220 / +600°C

Options


Transmitter 4-20mA	In-Head Transmitter, standard or ATEX Explosion proof. Please select from our standard range, see "transmitter" chapter, specify make, model and range.
Swing-Cover head	DAN. Transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H. Transmitter in cover. Insert with ceramic block

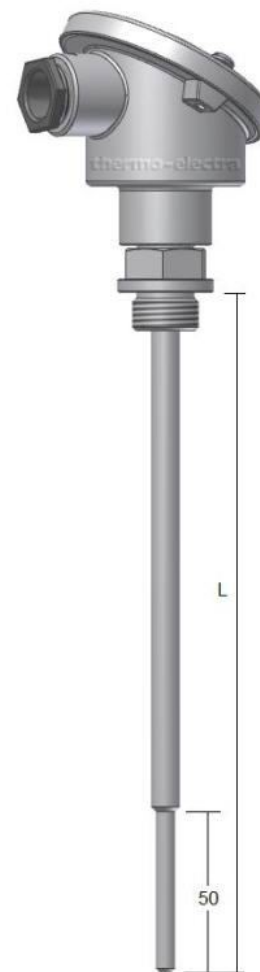


Tolerance values as a function of temperature for 100 Ω thermometers

Tolerances for 100 Ω thermometers

temp °C	class A		class B	
	±°C	±°Ω	±°C	±°Ω
-200	0.55	0.24	1.3	0.56
-100	0.35	0.14	0.8	0.32
0	0.15	0.06	0.3	0.12
100	0.35	0.13	0.80	0.30
200	0.55	0.20	1.3	0.48
300	0.75	0.27	1.8	0.64
400	0.95	0.33	2.3	0.79
500	1.15	0.38	2.8	0.93
600	1.35	0.43	3.3	1.06
700	-	-	3.8	1.17
800	-	-	4.3	1.28
850	-	-	4.6	1.34

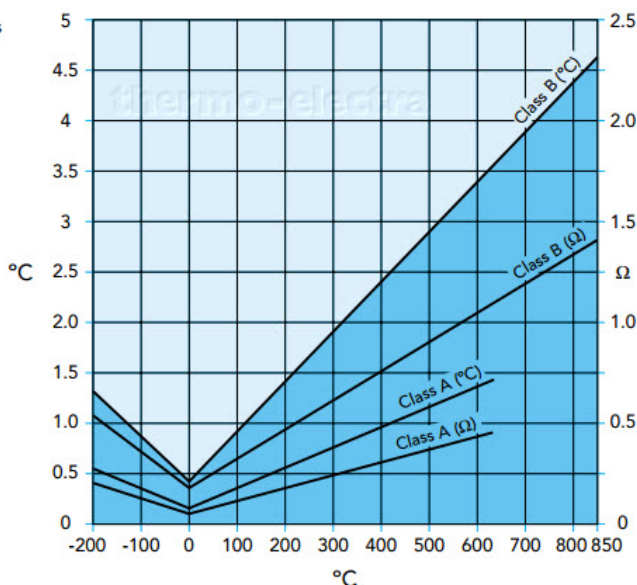

Ordering code

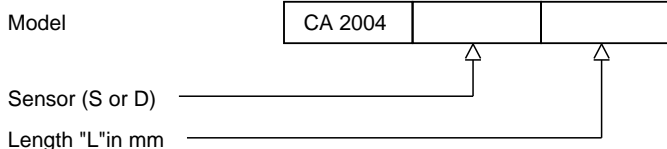

H2-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com

