FT 3070 Flanged thermowell - straight

Thermowell

Design	Drilled bar stock with welded process flange
Materials	SS 316 - (Wst 1.4401) standard

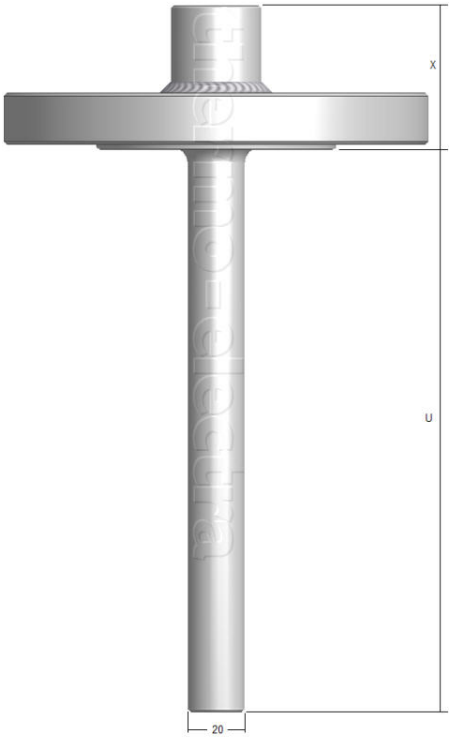

Stem / Shaft

Diameter	20mm
Bore	6.6 mm
Bottom thickness	5 mm
Female connection	1/2" NPT

Flange

Flange facing	Flat Face, Raised Face, Ring Type Joint, Tongue Face, or Groove Face
Standards	ASME B16.5, DIN 2526/2527, or EN 1092-1
Flange weld	Full Penetration, partial penetration, or screwed flange seal welded

Dimensions

Insertion length "U"	To specify
Lagging "X"	To specify, standard 60mm
Flange size	To specify
Flange rating	To specify
Flange facing	To specify

Options

Other materials and dimensions
Fully machined from bar, no weldings
Protective coating, PTFE, Halar, Stellite etc.
Tagging
Wake frequency calculation

Ordering code

Model | FT 3070 | | | | | |

"U" length in mm
"X" length in mm
Flange size
Flange rating
Flange facing

H3-1 Rev.0 7/07

thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com