

ML7038B Multipoint temperature sensor with guiding tube system



Measuring system

Type	Springloaded measuring
Construction	"B" for ML 7038
	Springloaded measuring points

Replaceable


During proces each sensor is replaceable

Guiding tubes

Sheath material	Fixed guiding tubes with 3 mm mineral insulated sensor
Length L1 to Ln	Customer to specify
Hot junction	Customer to specify
Calibration	Grounded or ungrounded
For duplex	K, T, J, E, N, U or L
Accuracy	KK, TT, JJ, EE, NN, UU or LL
	According IEC 584-1 / DIN 43710

Application

System	For use in thermowell or welded tubes
Cold end	Hot junction springloaded contact to innerwall of the thermowell
Style / Connection	Springloaded construction
Terminals	In connectionbox by terminal blocks
	Each element has 2 terminals and if required an earth terminal

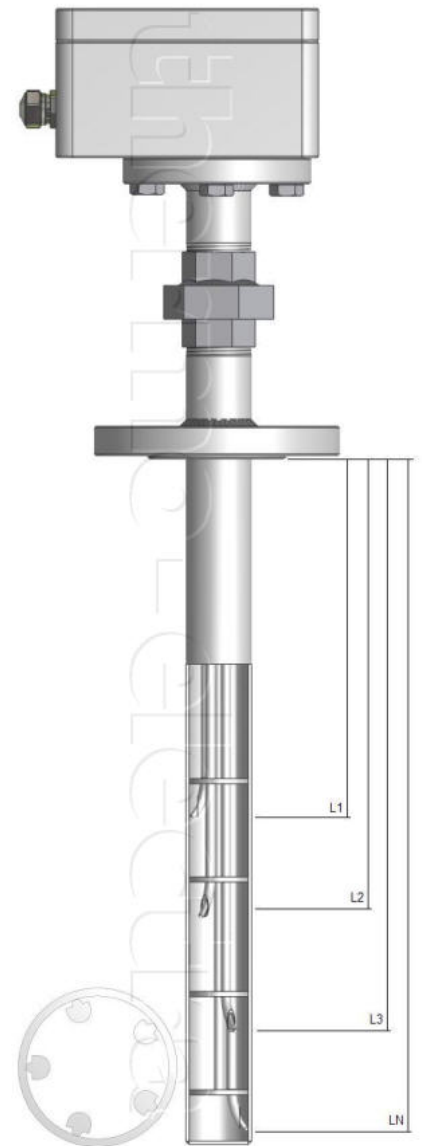

H7-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
<http://www.thermo-electra.com>

