

SW 3020 Threaded thermowell - tapered

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Male threaded
Thread size	1/2"NPT, 3/4"NPT or 1"NPT
Material	SS 316 - (Wst 1.4401)

Stem / Shrank

Wetted part	Tapered, see table
Insertion length "U"	To specify
Bore Size	6.6 mm standard
Excentricity	<1 micrometer
Bottom thickness	5 mm

Connection length "x"

Standard length	50mm
Extended Hexagon	To specify

Female connection

Threaded	1/2" NPT
Other thread size	To specify


Options

Other materials and dimensions
 Plug and chain for test wells
 Protective coating; PTFE, Halar, Stellite etc.
 Tagging
 Wake frequency calculation

Process aansluiting	D1	D2	HEX
1/2" NPT	17 mm	13 mm	27 mm
3/4" NPT	22 mm	17 mm	32 mm
1" NPT	25 mm	20 mm	36 mm



Ordering code

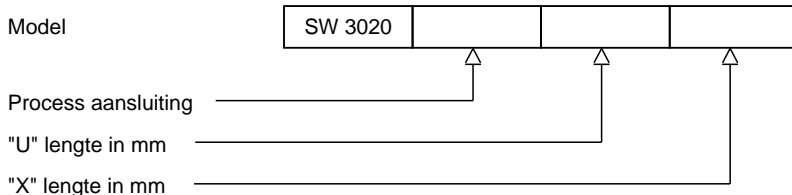

H3-1 Rev.0 7/07



thermo-electra
 temperature sensor solutions

Thermo Electra B.V.
 Weteringweg 10
 2641KM Pijnacker
 The Netherlands

Phone +31 (0)15 - 3621200
 Fax +31 (0)15 - 3694082
 Email sales@thermo-electra.com
 http://www.thermo-electra.com

