

ME 2072 General purpose resistance thermometer with FEP/PFA cable

Sheath	
Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Diameter "D"	3 or 6 mm, customer to specify
Length "K"	Customer to specify
Lead wire	
	FEP/PFA insulated flexible cable with tinned copper braiding, 240 °C
Lead wire length "L"	Customer to specify
Sensor	
	Single or Duplex Pt100
Accuracy	According IEC 60751 Cl. B, A or AA
Style / Connection	3-wire system standard, 4-wire system optional
Range	Standard -20 / +400°C, optional -220 / +600°C
Testing	Tested at 500 Vdc / 20°C
Insulation resistance	Minimum 100Mohm

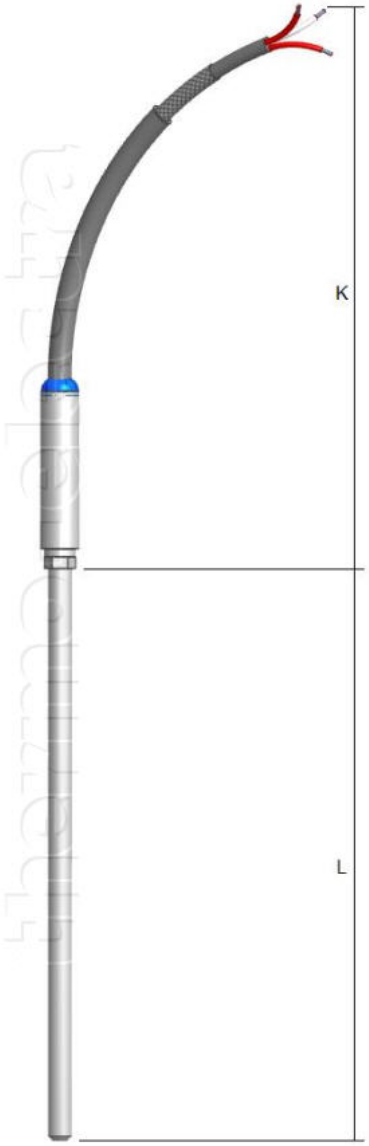

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

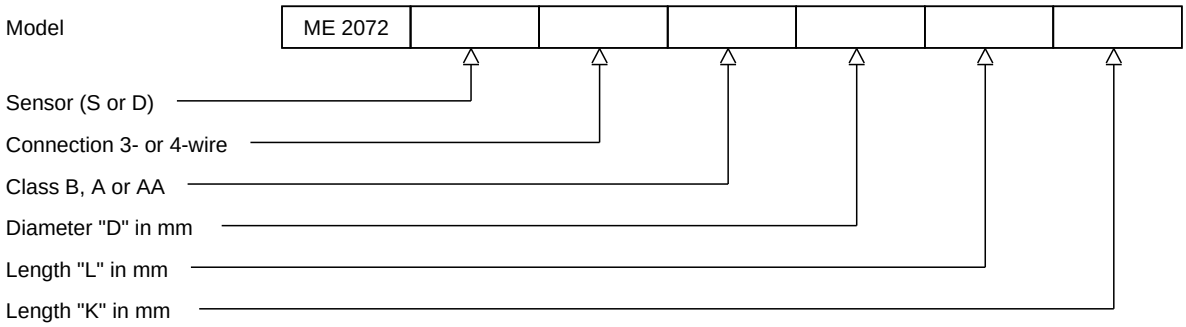

H2-1 Rev.0 7/07

thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com